

Featuring **ISOCORE** Technology\* + **DROPLOCK 100** +

The pictures may differ in color from the original product.

## GOTHAM OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C


### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107511	106202502	SLY X-Large, Gotham Oak, 7,5 mm	7640165921814	39



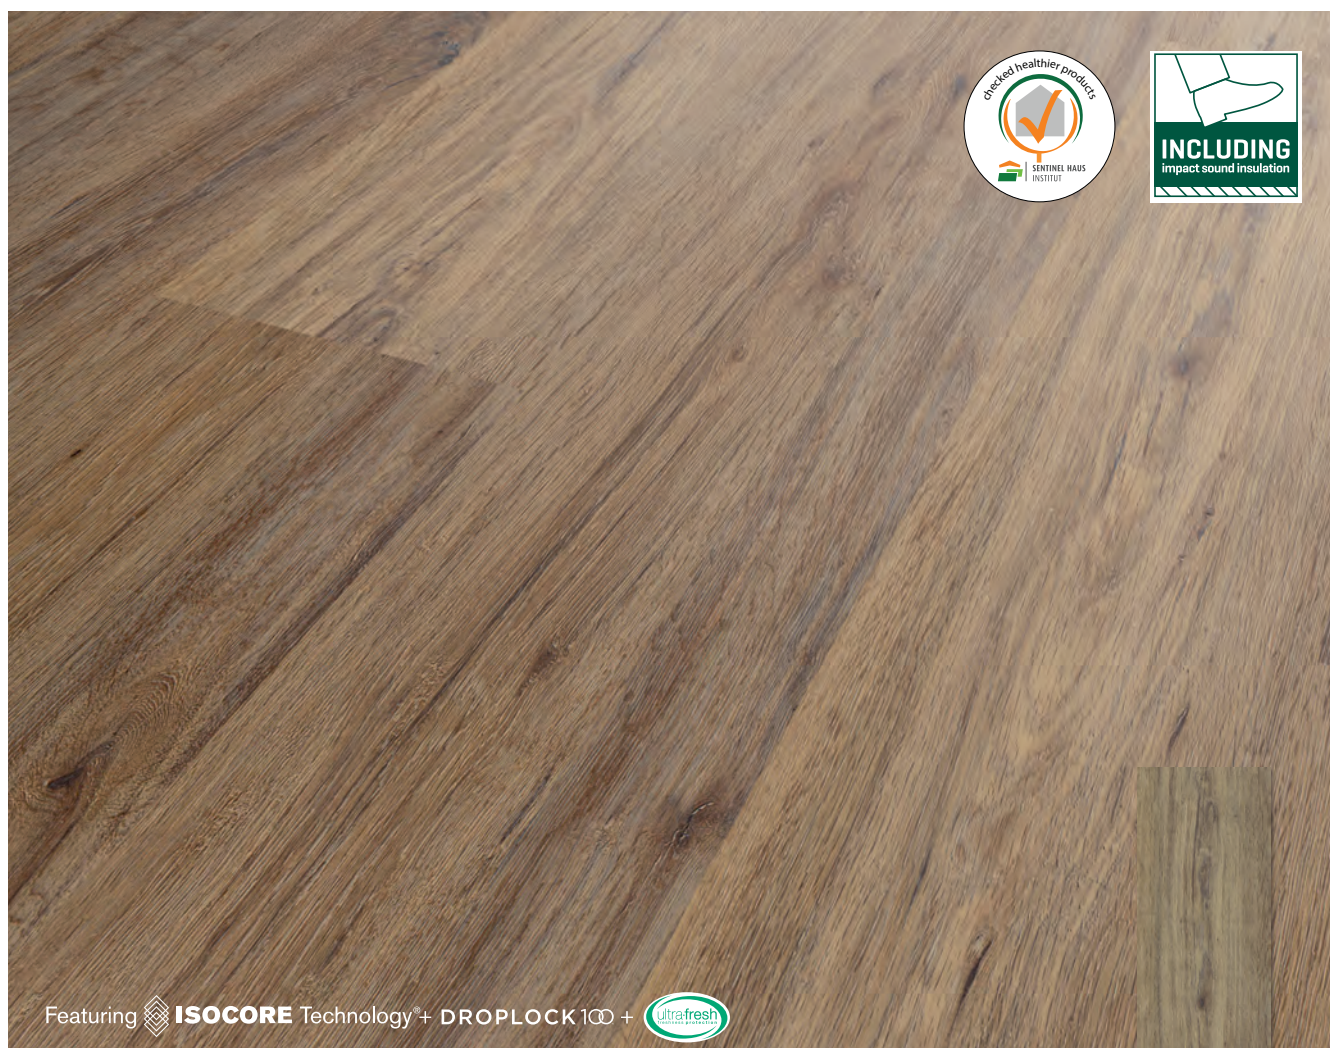

Featuring **ISOCORE** Technology\* + **DROPLOCK 100** +

The pictures may differ in color from the original product.

## EDINBURGH OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C


### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107515	106202504	SLY X-Large, Edinburgh Oak, 7,5 mm	7640165921869	39



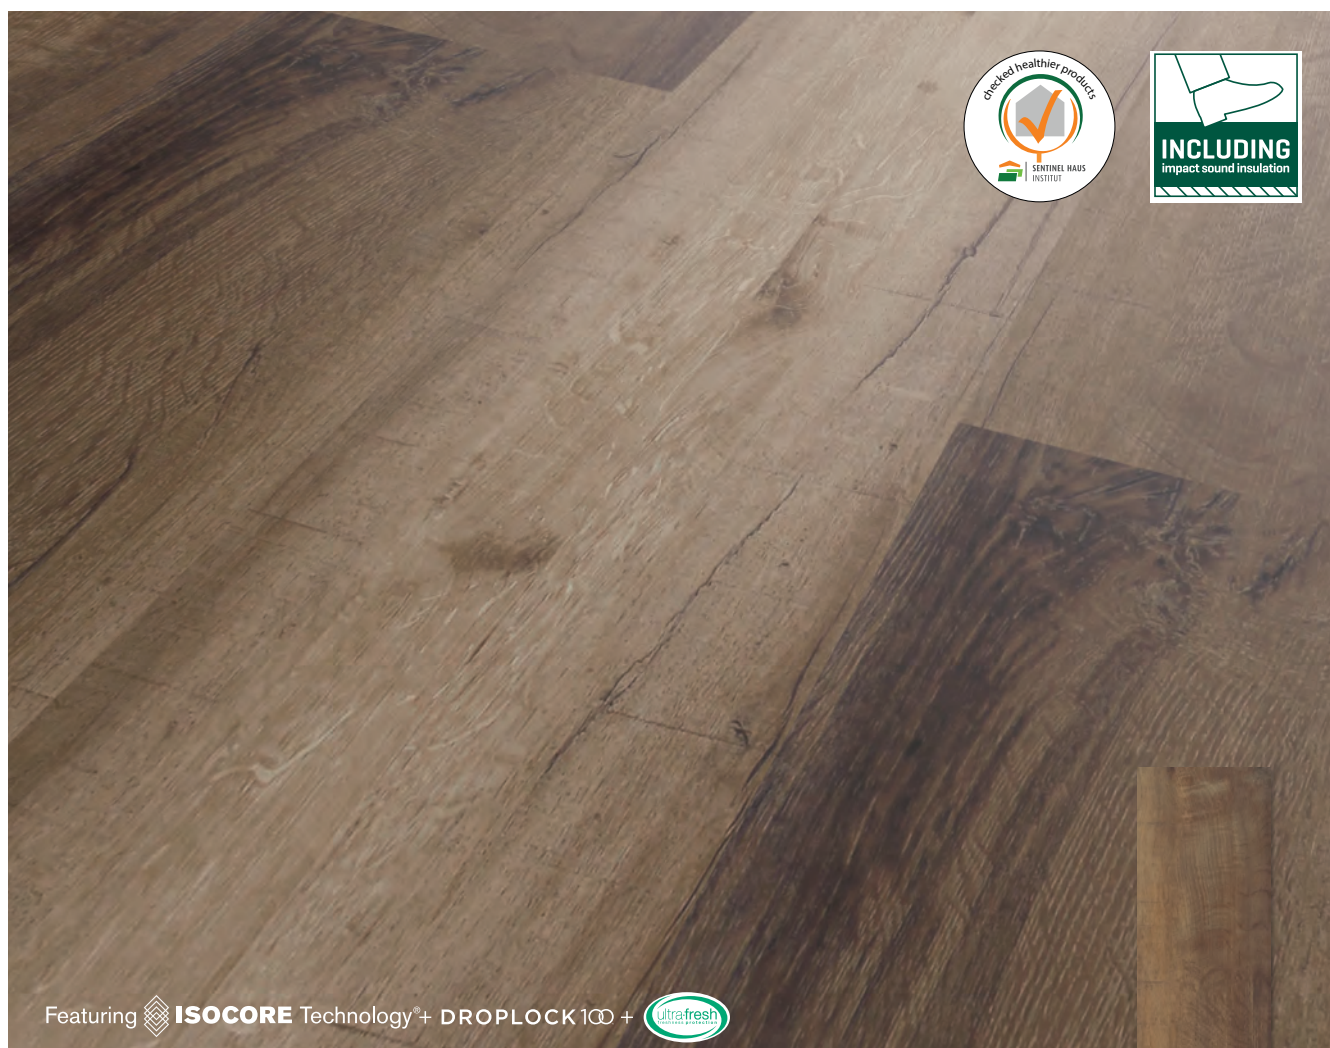

Featuring **ISOCORE** Technology® + **DROPLOCK 100** +

The pictures may differ in color from the original product.

## BUCKINGHAM OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

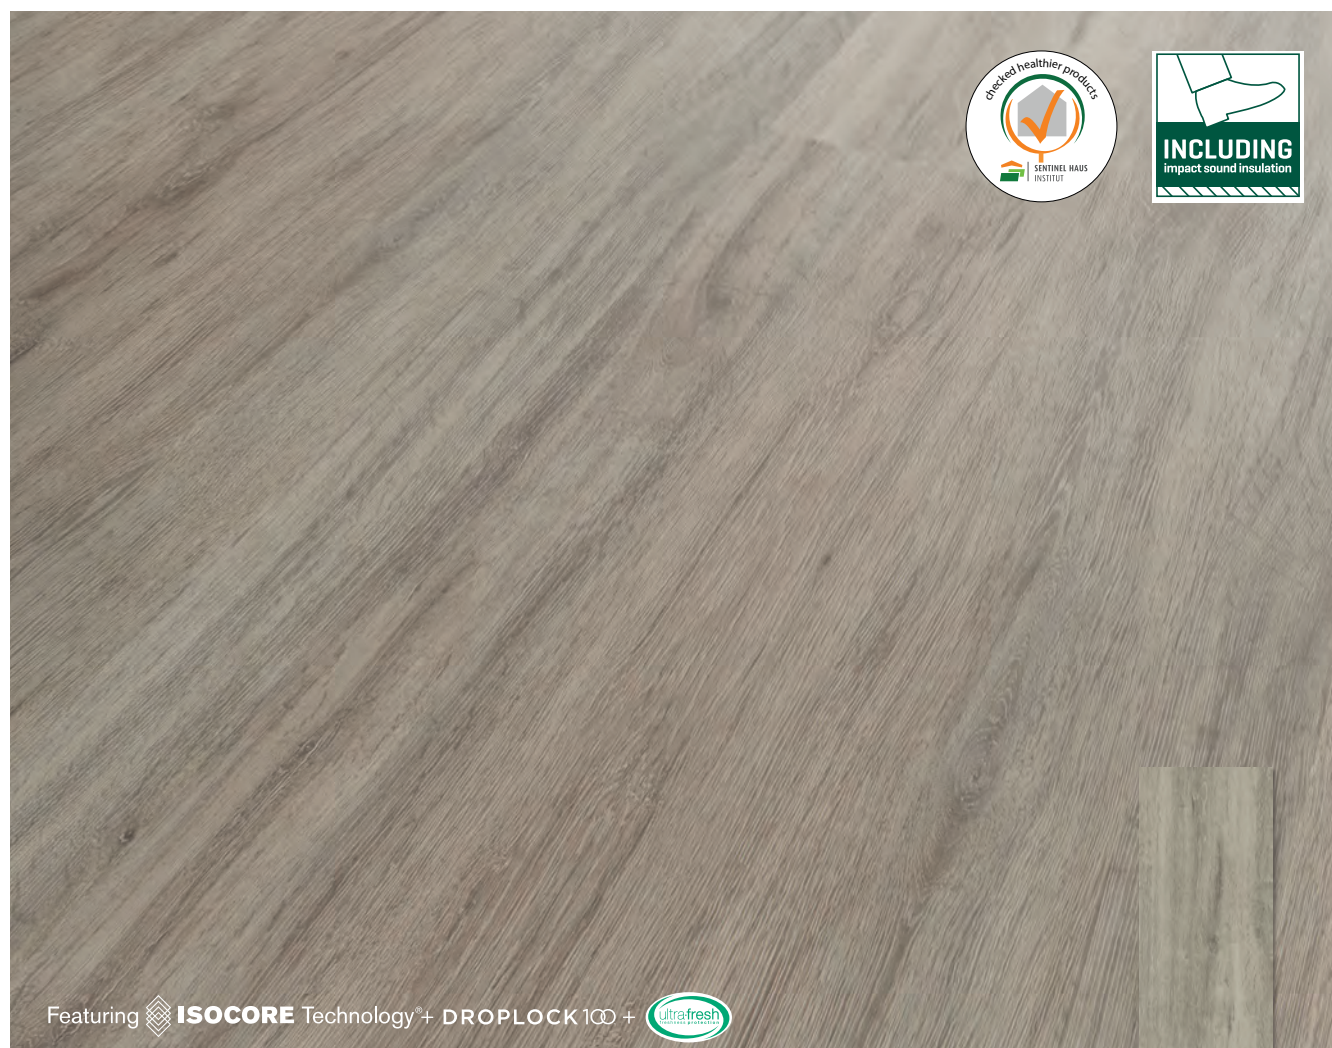

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-2	106202506	SLY X-Large, Buckingham Oak, 7,5 mm	7640165921852	39



Featuring  **ISOCORE** Technology®+ **DROPLOCK 100** + 

The pictures may differ in color from the original product.

## ABERDEEN OAK

- ◇ Natural wood look (IRE)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I107502	106202508	SLY X-Large, Aberdeen Oak, 7,5 mm	7640165921838	39



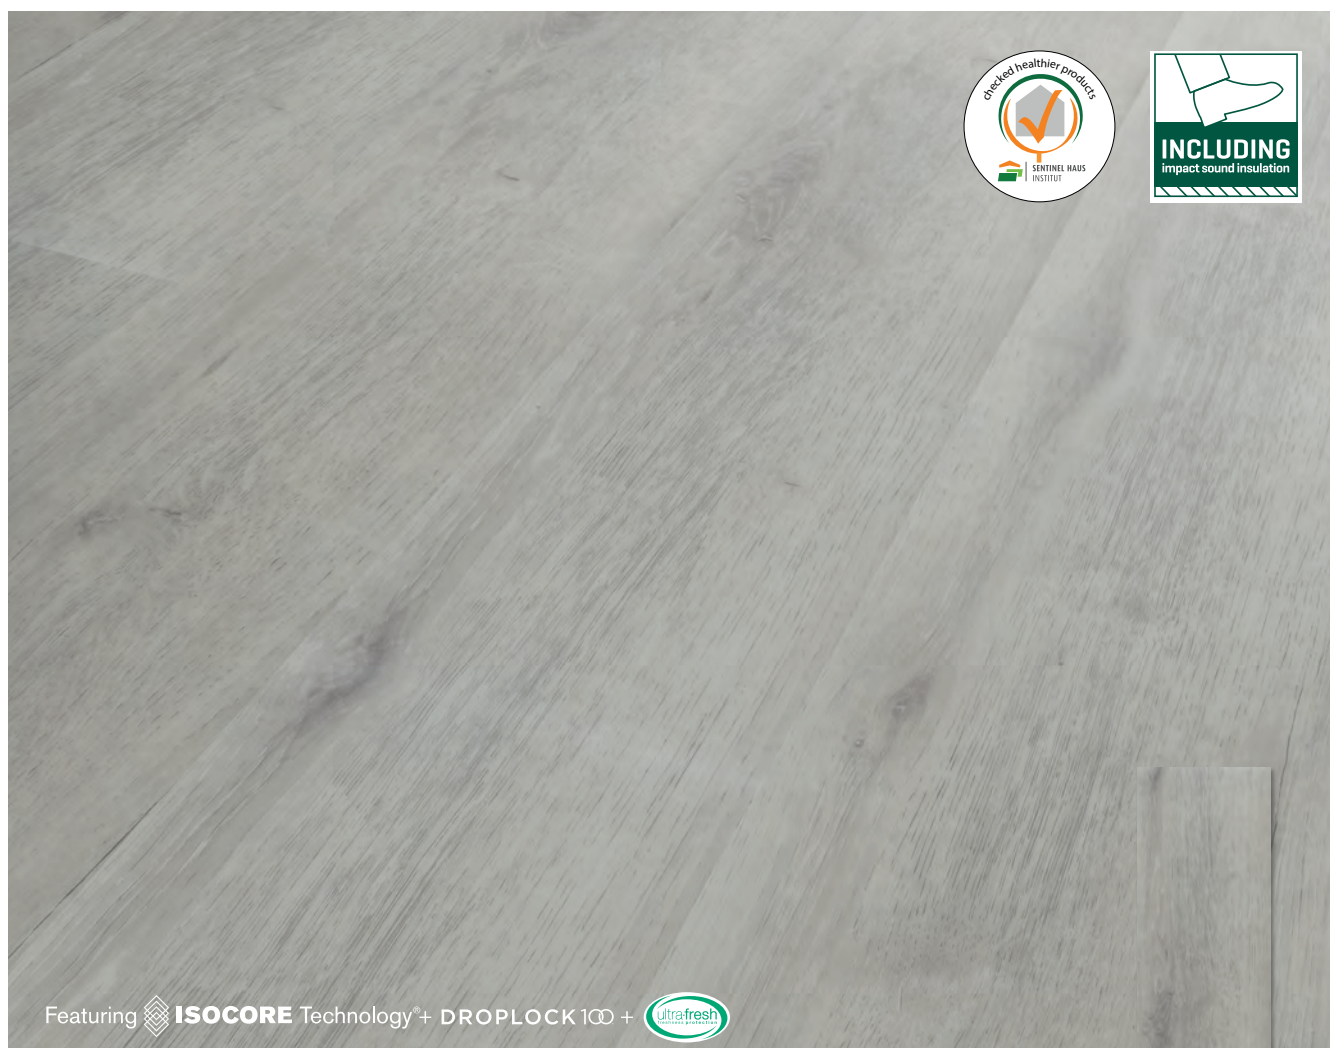

Featuring **ISOCORE** Technology<sup>®</sup> + **DROPLOCK 100** +

The pictures may differ in color from the original product.

## CHELSEA OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275115	106202510	SLY X-Large, Chelsea Oak, 7,5 mm	7640165921821	39



Featuring  **ISOCORE** Technology+ **DROPLOCK 100** + 

The pictures may differ in color from the original product.

## BRISTOL OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 1510 x W 220 mm
- ◇ Carton content 7 planks = 2,325 m<sup>2</sup>
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

### Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

### Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
1032910	106202512	SLY X-Large, Bristol Oak, 7,5 mm	7640165921807	39