

Featuring **ISOCORE** Technology®+ **DROPLOCK 100** +

The pictures may differ in color from the original product.

DUBLIN OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-8	106202602	SLY XX-Large, Dublin Oak, 7 mm	7640165921876	36

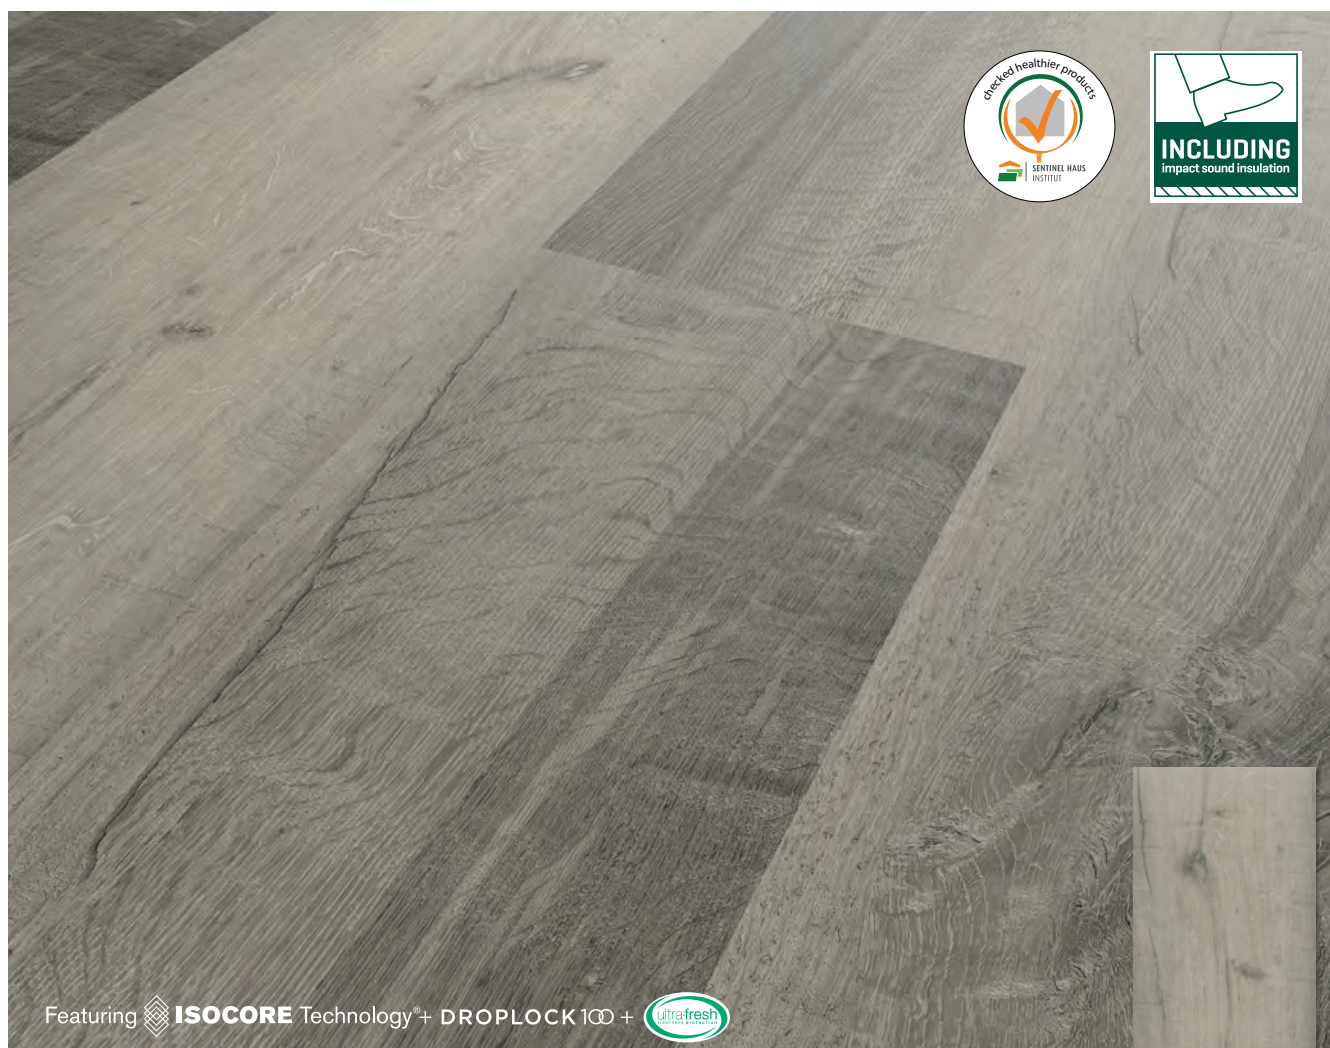

The pictures may differ in color from the original product.

COTTON OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I7415-11	106202604	SLY XX-Large, Cotton Oak, 7 mm	7640165921845	36

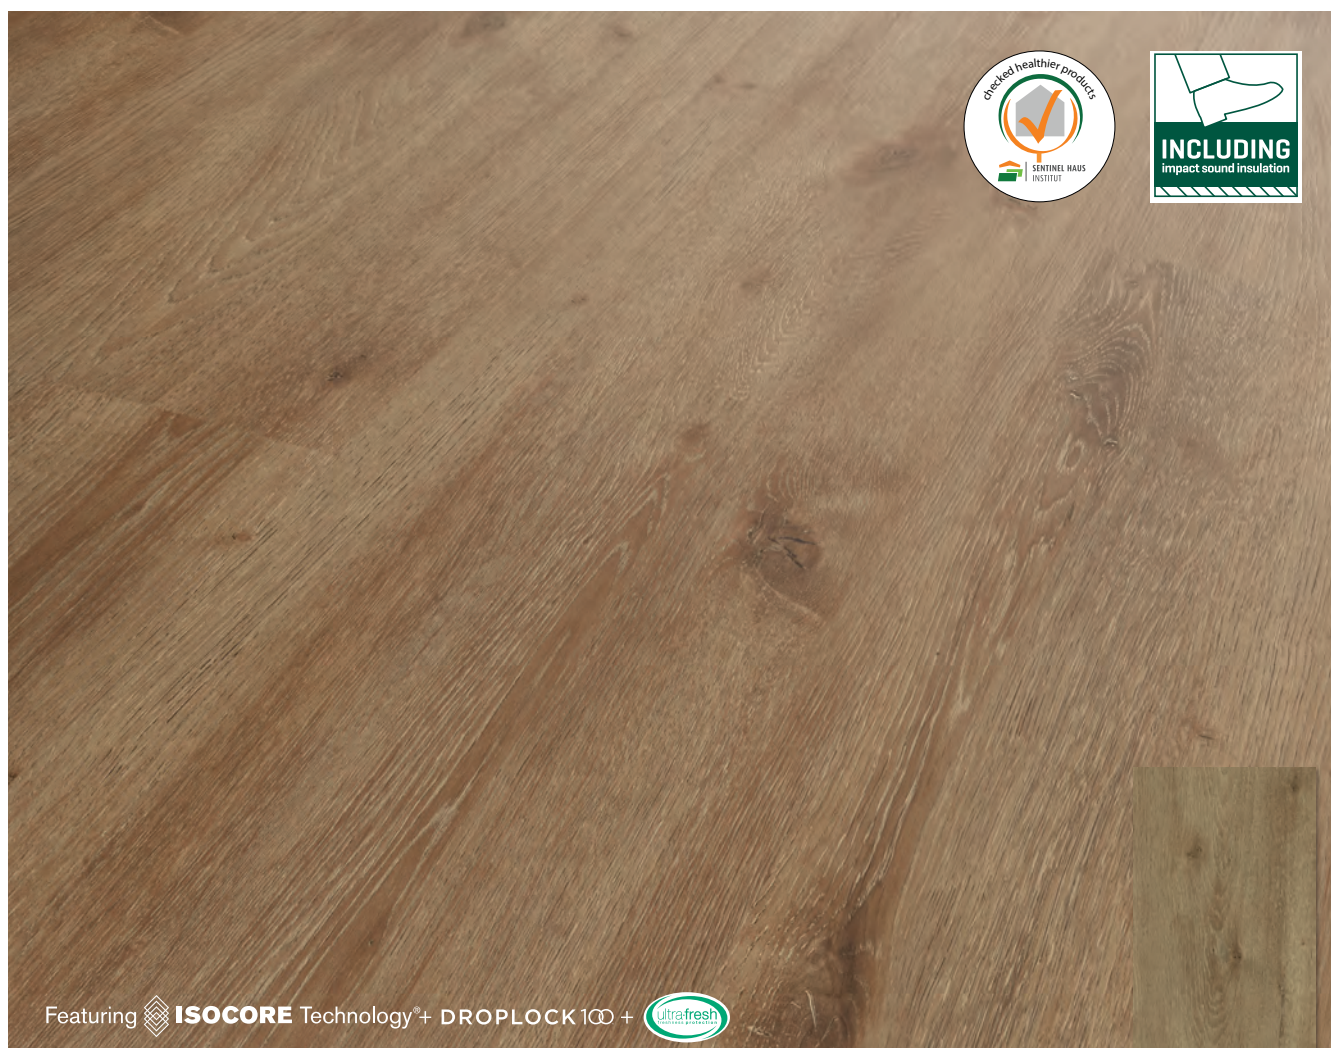

The pictures may differ in color from the original product.

CANSIGTON OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275114	106202606	SLY XX-Large, Cansigton Oak, 7 mm	7640165922118	36

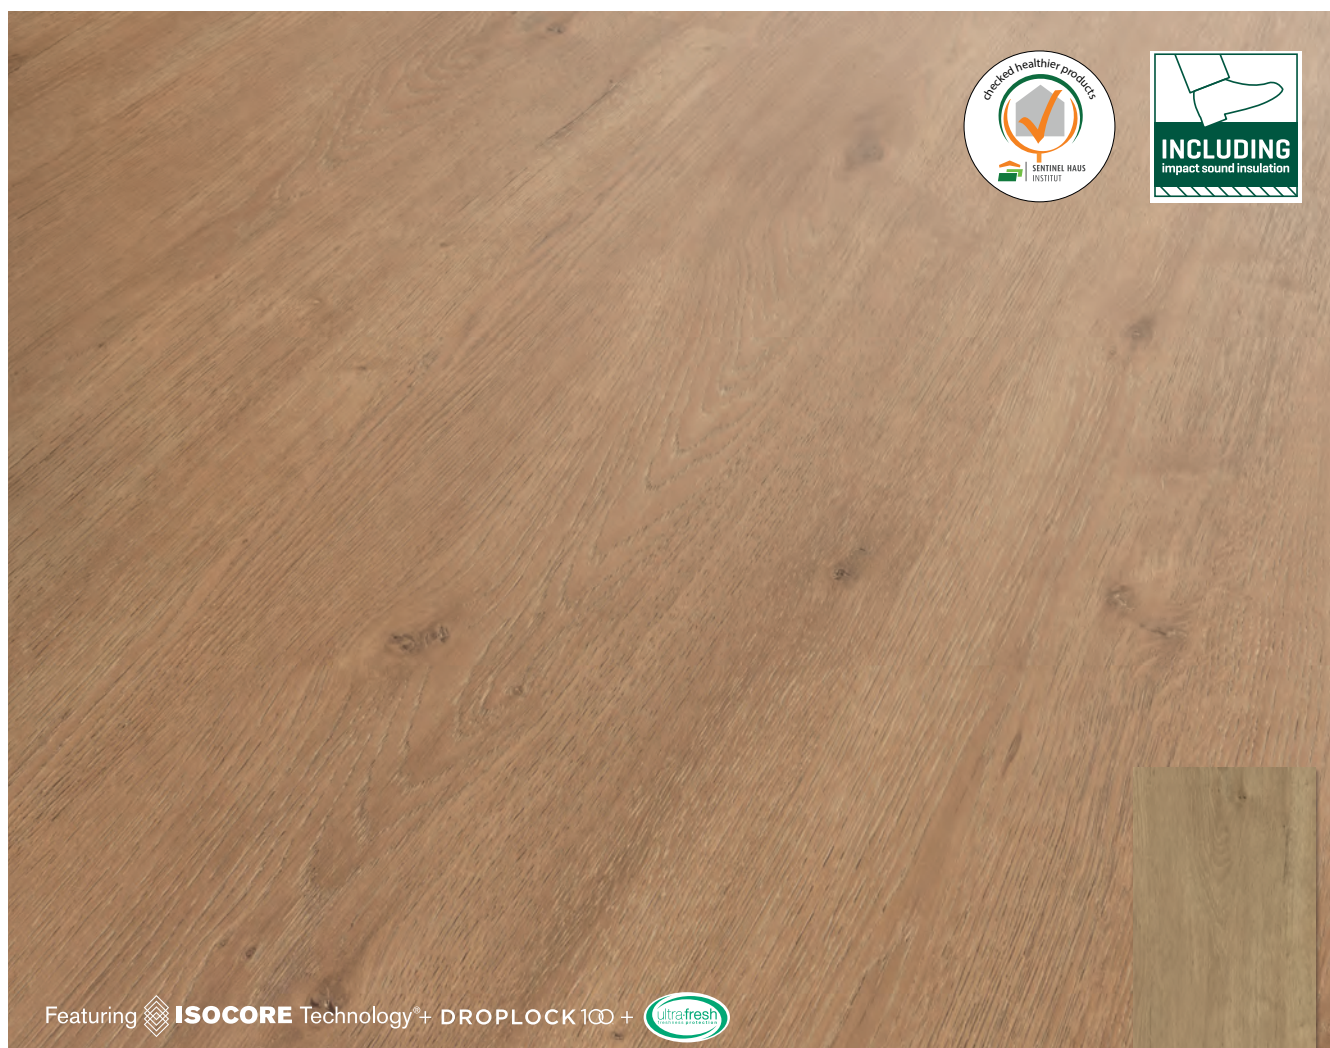

Featuring **ISOCORE** Technology[®] + **DROPLOCK 100** +

The pictures may differ in color from the original product.

NOTTING HILL OAK

- ◇ Natural wood look (Barnside)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7 mm mounting height
- ◇ Top layer 1,5/0,55 mm
- ◇ L 1510 x W 300 mm
- ◇ Carton content 6 planks = 2,718 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R9
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I275117	106202608	SLY XX-Large, Notting Hill Oak, 7 mm	7640165922125	36