

Featuring **ISOCORE Technology®** + **DROPLOCK 100** +

The pictures may differ in color from the original product.

TITAN

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C



Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

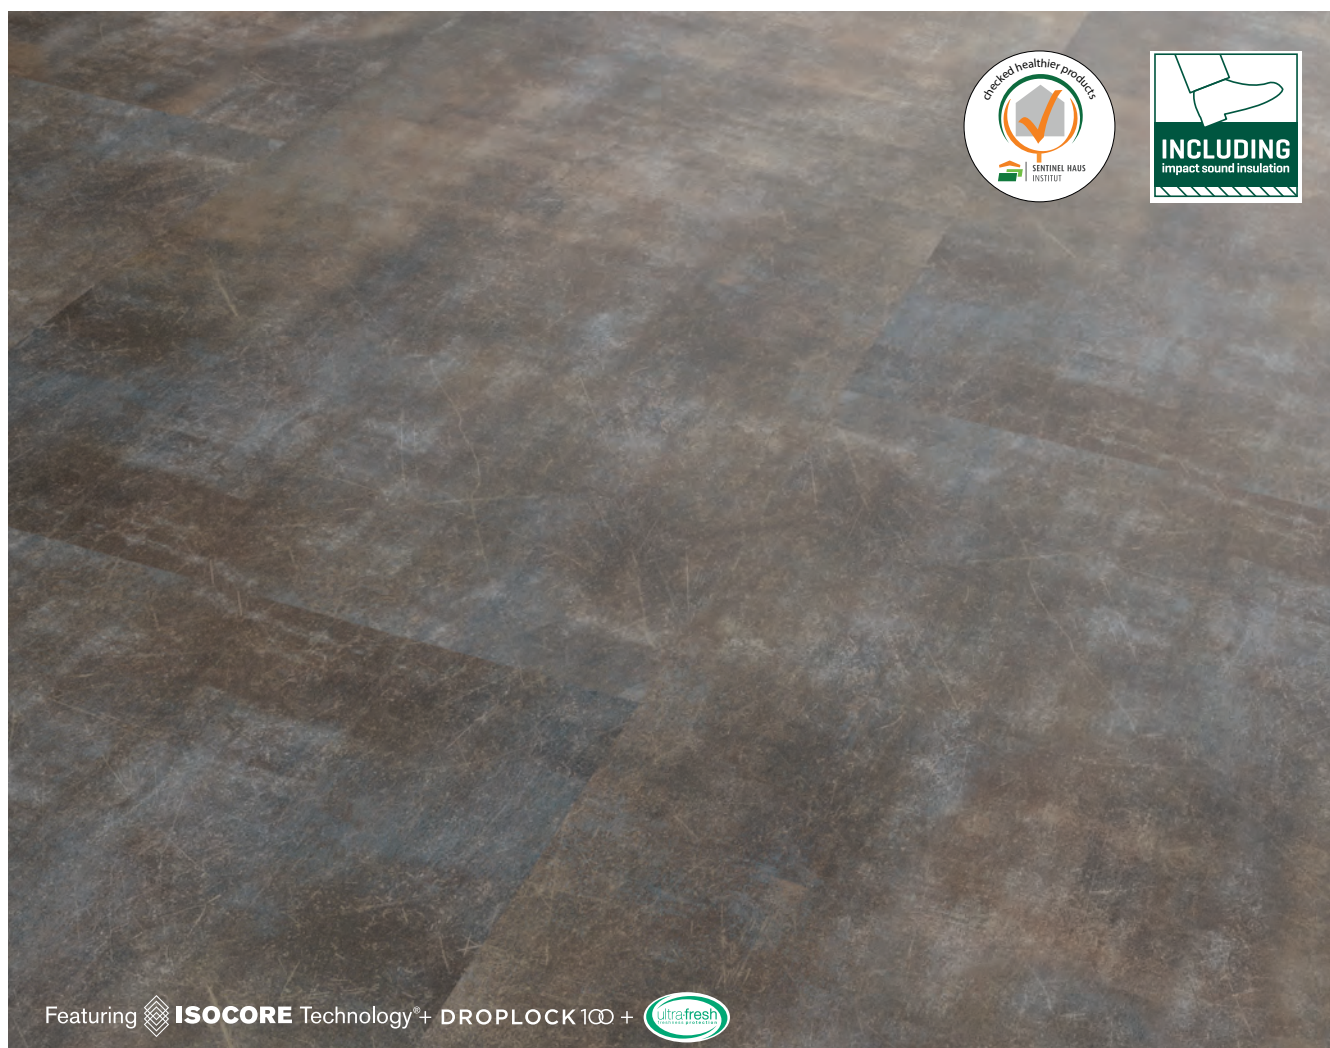

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I40213	106202702	SLY Large, Titan, 7,5 mm	7640165921883	30



Featuring  **ISOCORE Technology**®+ **DROPLOCK 100** + 

The pictures may differ in color from the original product.

GOLDEN ROST

- ◇ Natural stone look (Satin)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I40211	106202704	SLY Large, Golden Rost, 7,5 mm	7640165921890	30

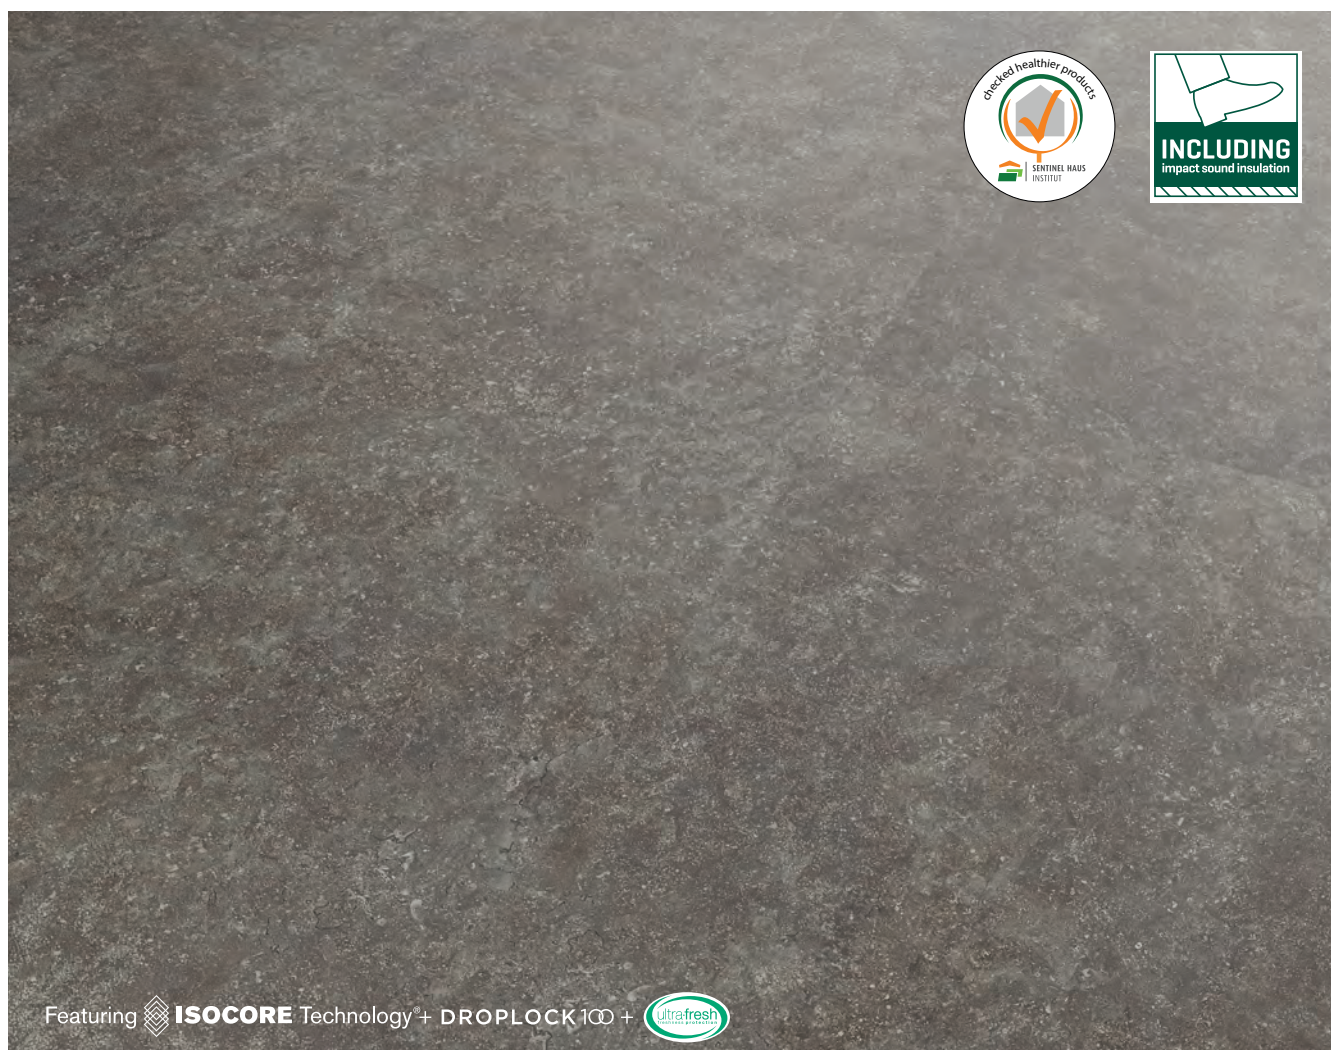

Featuring **ISOCORE** Technology[®] + **DROPLOCK 100** +

The pictures may differ in color from the original product.

LAVA


- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

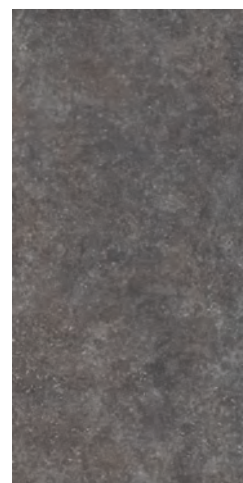

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442109	106202706	SLY Large, Lava, 7,5 mm	7640165921906	30

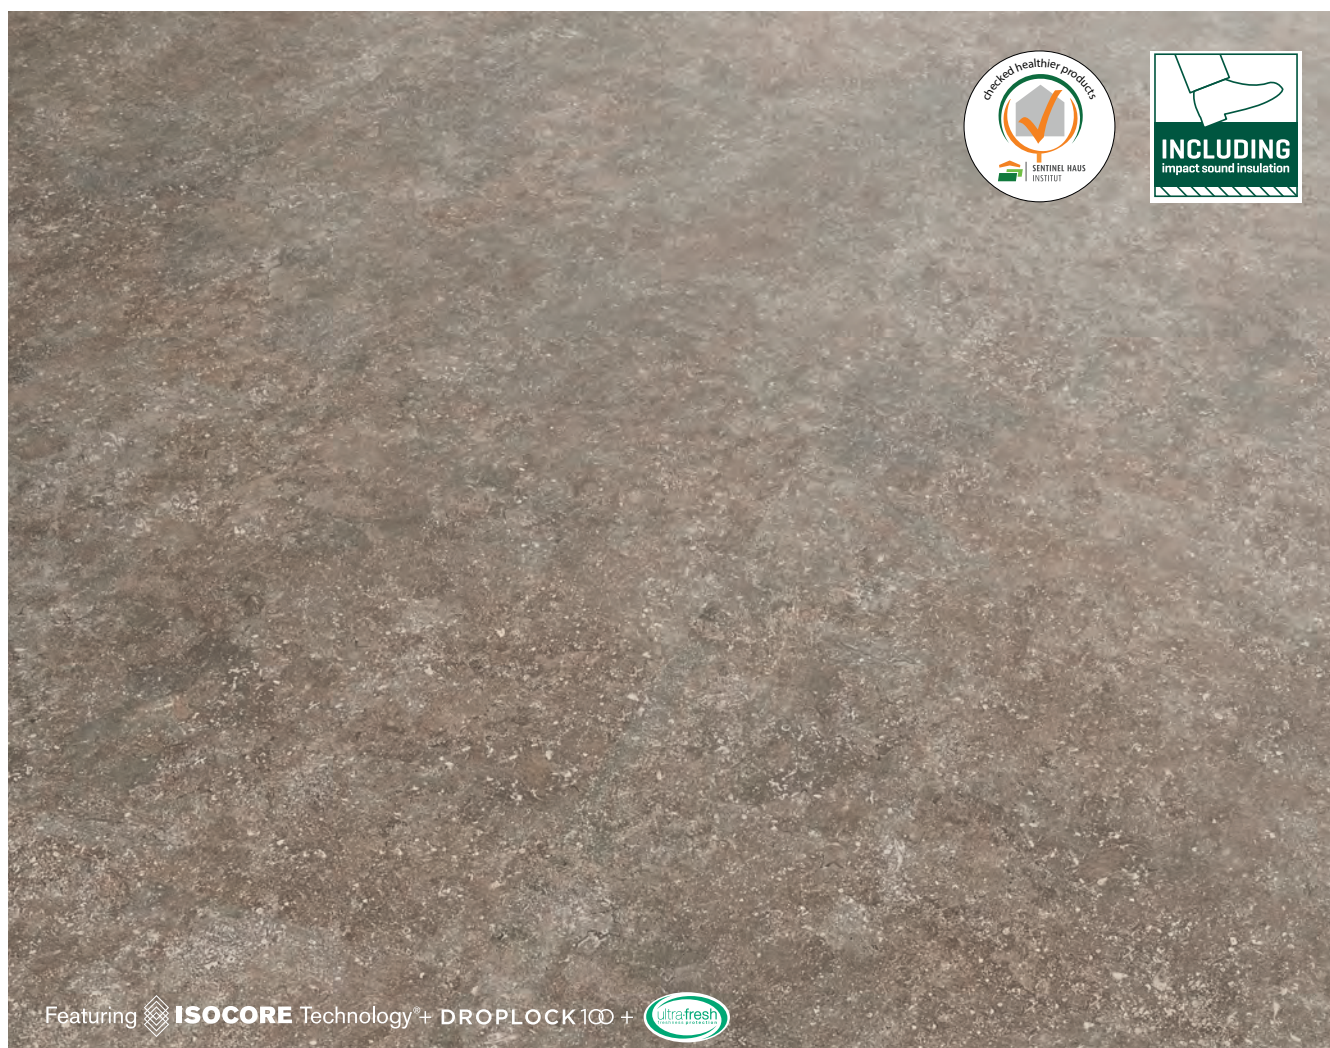

Featuring **ISOCORE** Technology* + **DROPLOCK100** +

The pictures may differ in color from the original product.

BRAVA

- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:


- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442107	106202708	SLY Large, Brava, 7,5 mm	7640165921913	30

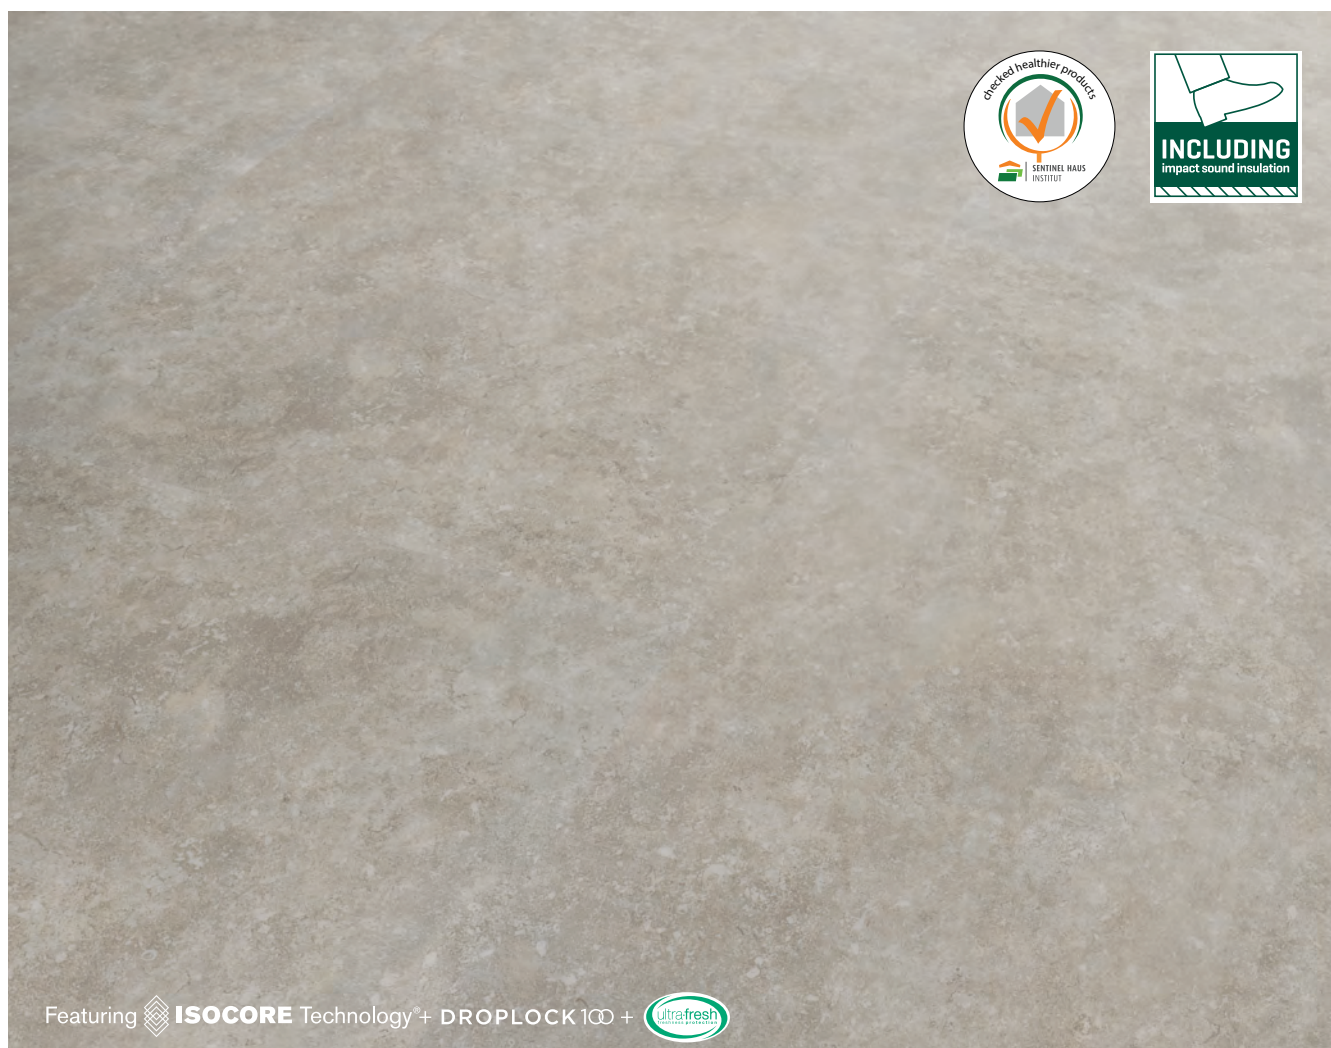

The pictures may differ in color from the original product.

AZURRE


- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature = use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat

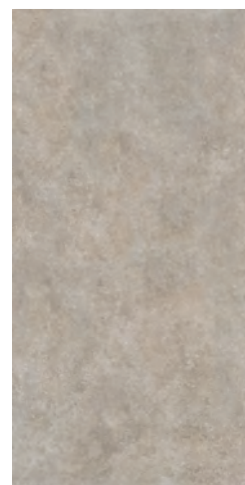

Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442102	106202710	SLY Large, Azurre, 7,5 mm	7640165921968	30



Featuring **ISOCORE** Technology®+ **DROPLOCK400** +

The pictures may differ in color from the original product.

MIDI

- ◇ Natural stone look (Honed)
- ◇ Dimensionally stable and water resistant
- ◇ Quiet, warm under foot and antibacterial
- ◇ Only 7,5 mm mounting height
- ◇ Top layer 2,0/0,55 mm
- ◇ L 812,8 x W 406,4 mm
- ◇ Carton content 6 planks = 1,982 m²
- ◇ Phthalate free and 100% recyclable
- ◇ Patented Droplock 100 connection
- ◇ Low emissions (certified A +)
- ◇ Slip resistance R10
- ◇ Integrated underlay mat
- ◇ Walk and sound reduction up to 18 db
- ◇ Utilization class 33

Note before laying:

- Amount needed + 10% of the area
- Clean underlay, hard, flat, stable and strong
- Uneven surface = max 3 mm per 1,2 m
- Acclimatize the planks horizontally in the room for at least 48h!
- Important: room temperature = soil temperature
= use temperature 13 ° C to 32 ° C

Points to note about the configuration:

- On linoleum, wood-based flooring: 0,2 mm PE Films building for decoupling mandatory!
- The planks must be properly clicked in!
- Provide expansion joints to walls and fixed objects of minimum 6 mm
- Maximum field size 10 x 10 m
- Do **NOT** use an additional underlay mat



Decor No.	Facido No.	Description	EAN	Pack/Pallet
I442101	106202712	SLY Large, Midi, 7,5 mm	7640165921975	30